




Durable.  
Stylish.  
That's All You Need.

# Surgical Saw Blades

Product Catalog

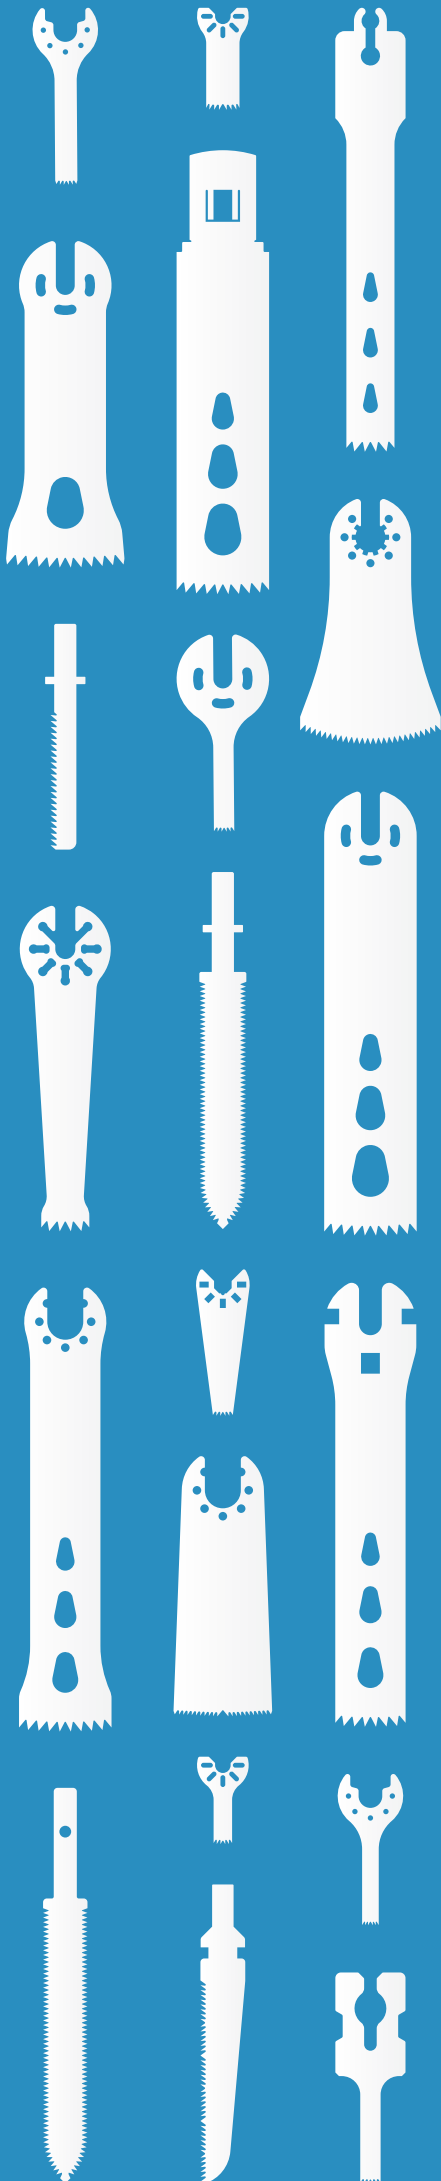




# Saw Blades Compatible with CONMED LINVATEC®




Brand Code **140**

For Reciprocating Saws and Some Micro Blades  
**100**

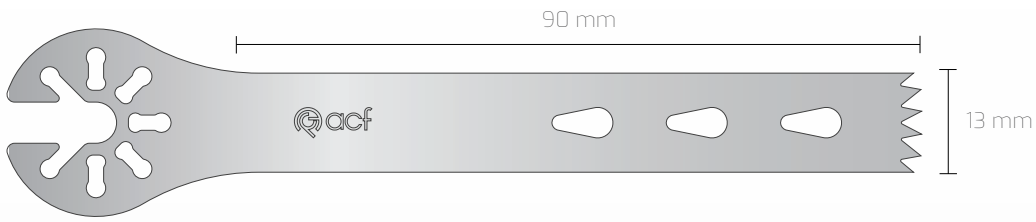


● Non Sterile  
● Sterile R

<b>Ref</b>	<b>140 130 090 089</b>	<b>140 130 090 090</b>	<b>140 130 090 100</b>	<b>140 130 090 119</b>	<b>140 130 090 120</b>
Thickness	0,89 mm	0,90 mm	1,00 mm	1,19 mm	1,20 mm

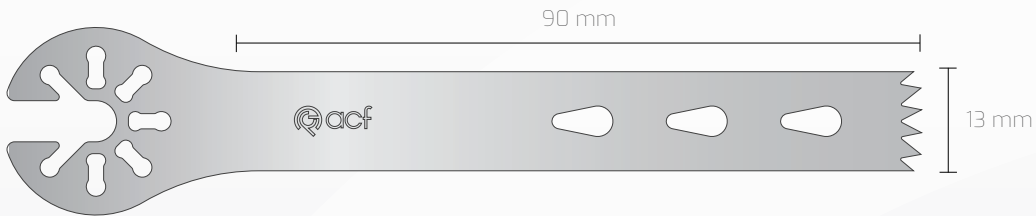


● Non Sterile  
● Sterile R

<b>Ref</b>	<b>140 130 090 127</b>	<b>140 130 090 130</b>	<b>140 130 090 137</b>	<b>140 130 090 140</b>	<b>140 130 090 147</b>
Thickness	1,27 mm	1,30 mm	1,37 mm	1,40 mm	1,47 mm

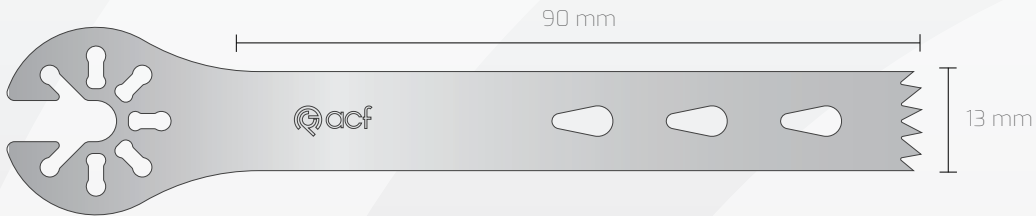

● Non Sterile  
● Sterile R

<b>Ref</b>	<b>140 130 090 150</b>
Thickness	1,50 mm

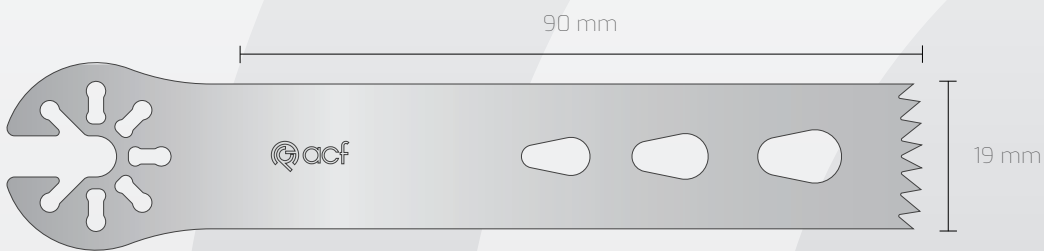


● Non Sterile  
● Sterile R

<b>Ref</b>	<b>140 190 090 089</b>	<b>140 190 090 090</b>	<b>140 190 090 100</b>	<b>140 190 090 119</b>	<b>140 190 090 120</b>
Thickness	0,89 mm	0,90 mm	1,00 mm	1,19 mm	1,20 mm


**Compatible Connections;**

M Power PRO6300, M Power2 PRO6350M, PowerPro Max PRO5300M, PowerPro Electric II PRO6125, PowerPro Pneumatic PRO6175, Hall 4 5067-002, Hall 3 5044-002, Versipower Plus 5071-002, Hall 50 PRO7300B

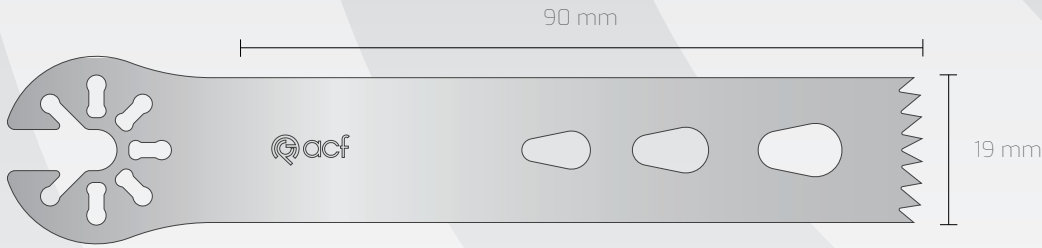


● Non Sterile  
● Sterile R

Ref	140 190 090 127	140 190 090 130	140 190 090 137	140 190 090 140	140 190 090 147
Thickness	1,27 mm	1,30 mm	1,37 mm	1,40 mm	1,47 mm

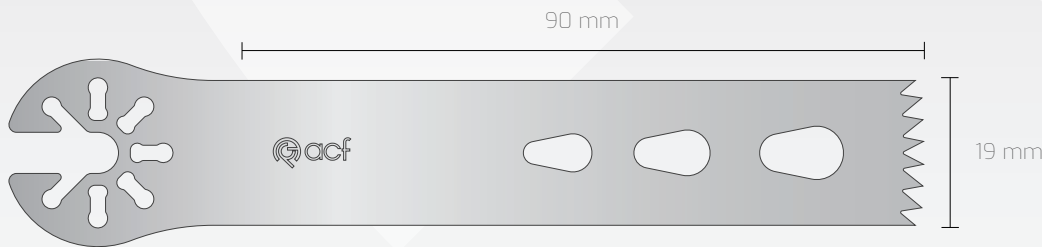


● Non Sterile  
● Sterile R

Ref	140 190 090 150
Thickness	1,50 mm

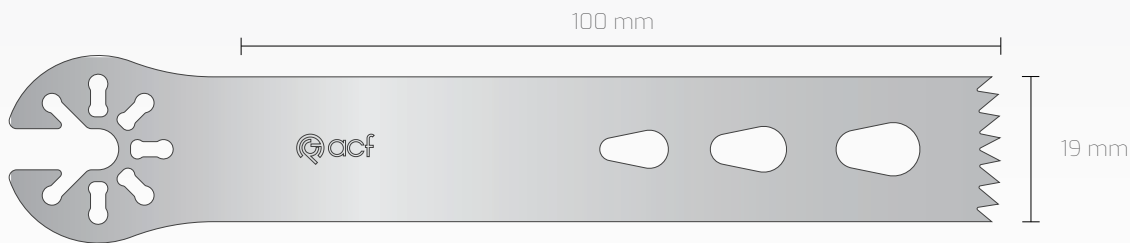


● Non Sterile  
● Sterile R

Ref	140 190 100 089	140 190 100 090	140 190 100 100	140 190 100 119	140 190 100 120
Thickness	0,89 mm	0,90 mm	1,00 mm	1,19 mm	1,20 mm

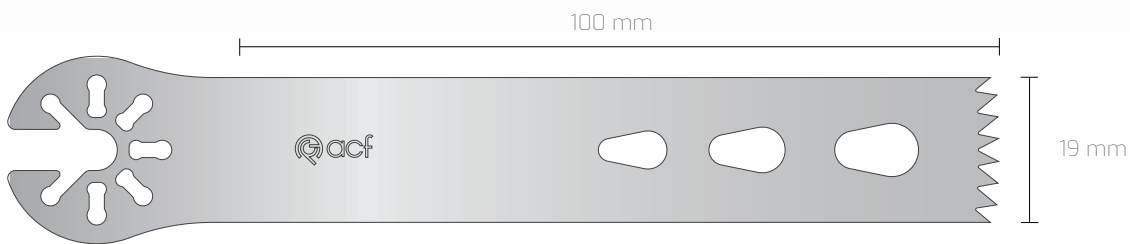


● Non Sterile  
● Sterile R

Ref	140 190 100 127	140 190 100 130	140 190 100 137	140 190 100 140	140 190 100 147
Thickness	1,27 mm	1,30 mm	1,37 mm	1,40 mm	1,47 mm

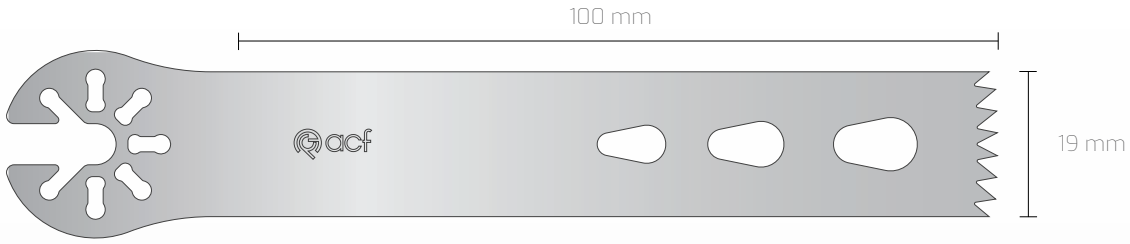


● Non Sterile  
● Sterile R

**Ref** 140 190 100 150  
**Thickness** 1,50 mm

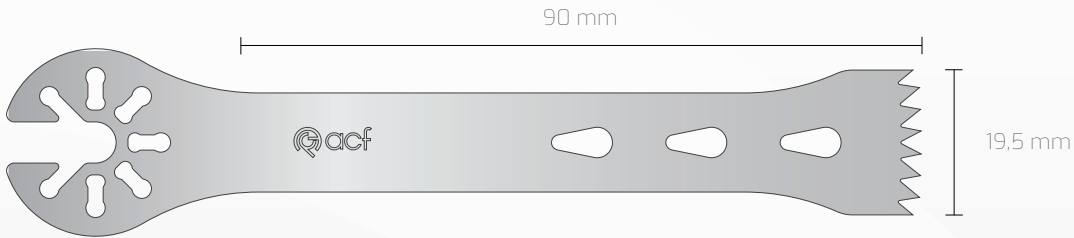


● Non Sterile  
● Sterile R

<b>Ref</b>	140 195 090 089	140 195 090 090	140 195 090 100	140 195 090 119	140 195 090 120
<b>Thickness</b>	0,89 mm	0,90 mm	1,00 mm	1,19 mm	1,20 mm

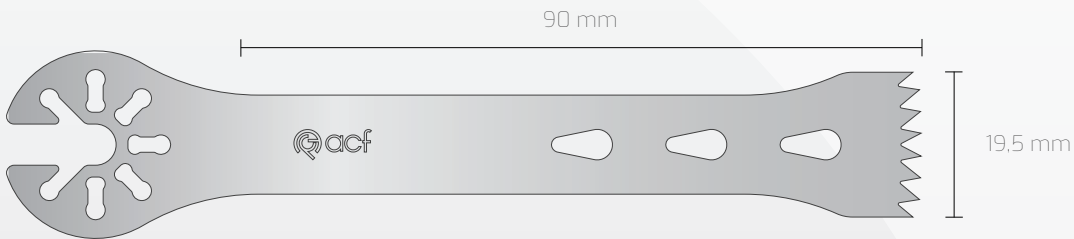

● Non Sterile  
● Sterile R

<b>Ref</b>	140 195 090 127	140 195 090 130	140 195 090 137	140 195 090 140	140 195 090 147
<b>Thickness</b>	1,27 mm	1,30 mm	1,37 mm	1,40 mm	1,47 mm

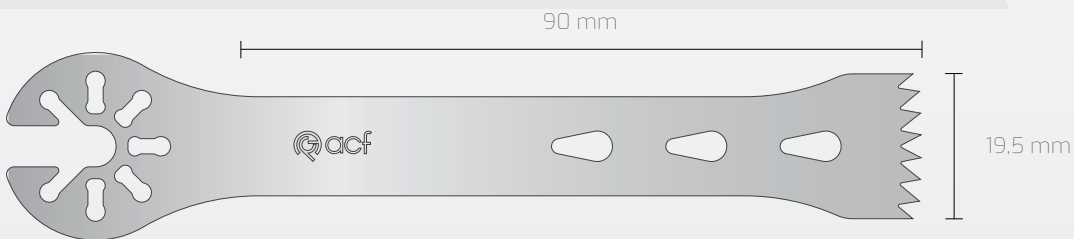


● Non Sterile  
● Sterile R

**Ref** 140 195 090 150  
**Thickness** 1,50 mm


**Compatible Connections;**

M Power PRO6300, M Power2 PRO6350M, PowerPro Max PRO5300M, PowerPro Electric II PRO6125, PowerPro Pneumatic PRO6175, Hall 4 5067-002, Hall 3 5044-002, Versipower Plus 5071-002, Hall 50 PRO7300B

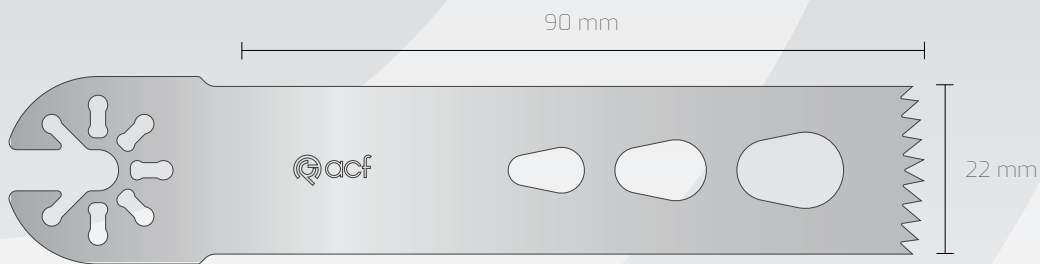


- Non Sterile
- Sterile R

<b>Ref</b>	<b>140 220 090 089</b>	<b>140 220 090 090</b>	<b>140 220 090 100</b>	<b>140 220 090 119</b>	<b>140 220 090 120</b>
Thickness	0,89 mm	0,90 mm	1,00 mm	1,19 mm	1,20 mm

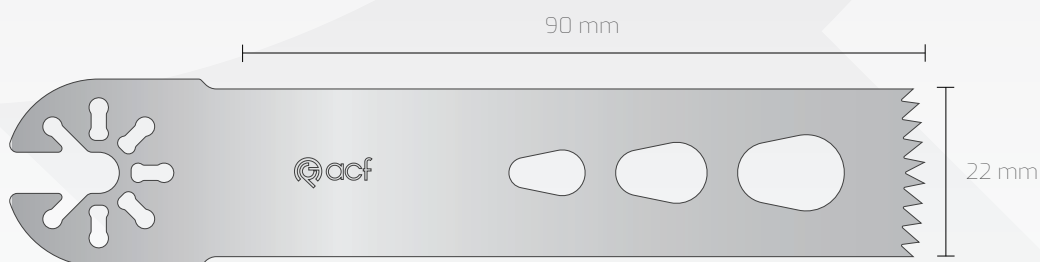


- Non Sterile
- Sterile R

<b>Ref</b>	<b>140 220 090 127</b>	<b>140 220 090 130</b>	<b>140 220 090 137</b>	<b>140 220 090 140</b>	<b>140 220 090 147</b>
Thickness	1,27 mm	1,30 mm	1,37 mm	1,40 mm	1,47 mm

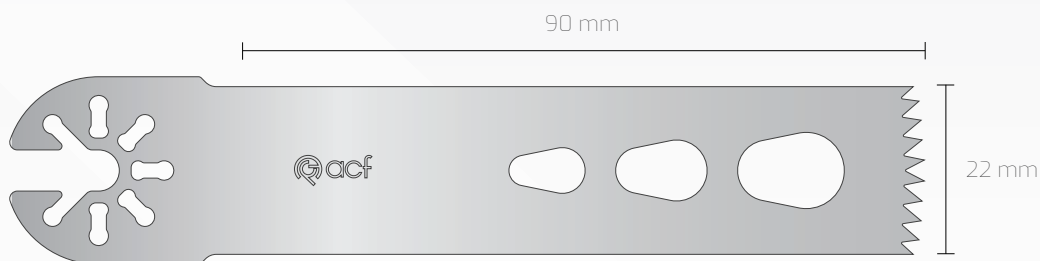


- Non Sterile
- Sterile R

<b>Ref</b>	<b>140 220 090 150</b>
Thickness	1,50 mm

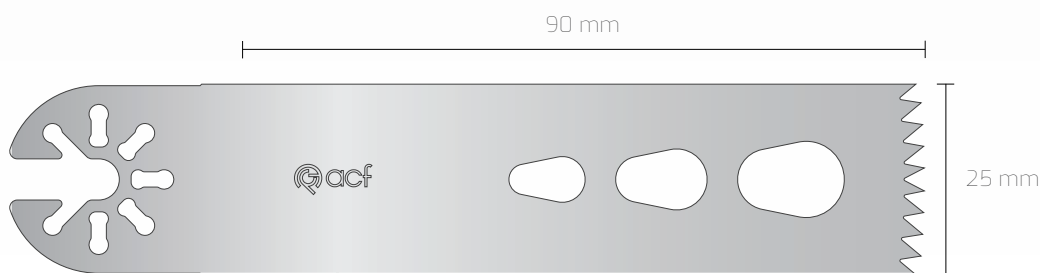


- Non Sterile
- Sterile R

<b>Ref</b>	<b>140 250 090 089</b>	<b>140 250 090 090</b>	<b>140 250 090 100</b>	<b>140 250 090 119</b>	<b>140 250 090 120</b>
Thickness	0,89 mm	0,90 mm	1,00 mm	1,19 mm	1,20 mm

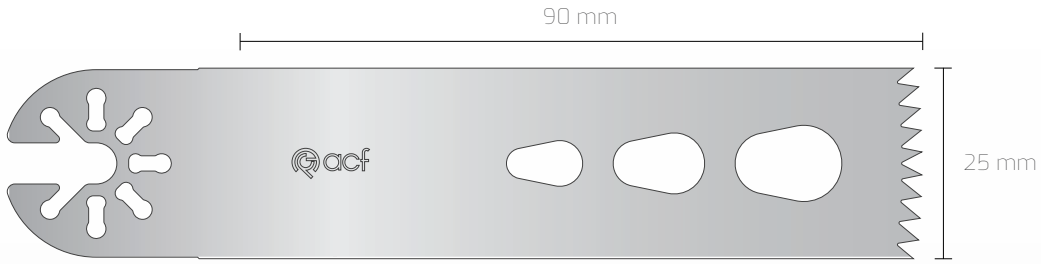


● Non Sterile  
● Sterile R

Ref	140 250 090 127	140 250 090 130	140 250 090 137	140 250 090 140	140 250 090 147
Thickness	1,27 mm	1,30 mm	1,37 mm	1,40 mm	1,47 mm

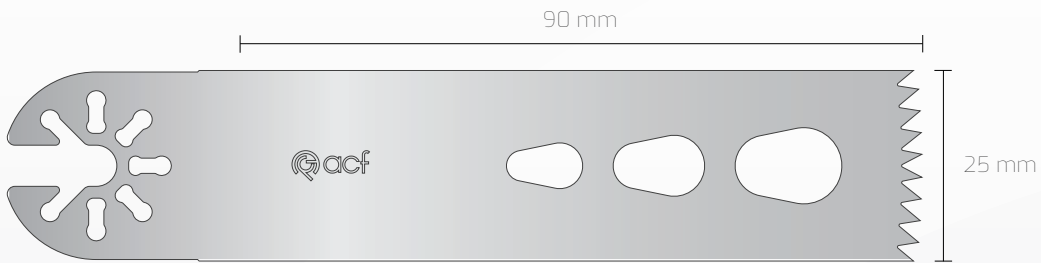


● Non Sterile  
● Sterile R

Ref	140 250 090 150
Thickness	1,50 mm

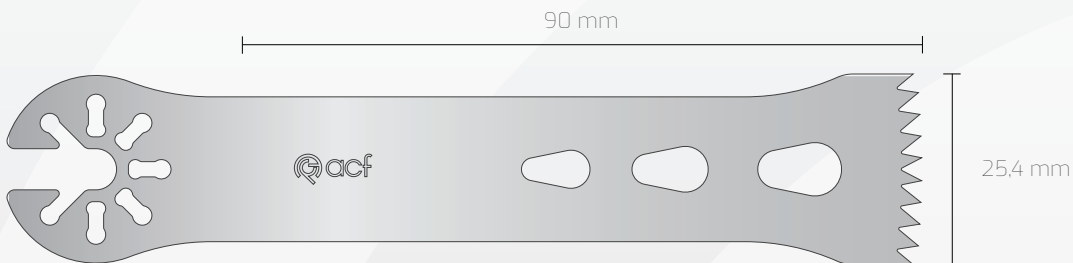

● Non Sterile  
● Sterile R

Ref	140 254 090 089	140 254 090 090	140 254 090 100	140 254 090 119	140 254 090 120
Thickness	0,89 mm	0,90 mm	1,00 mm	1,19 mm	1,20 mm

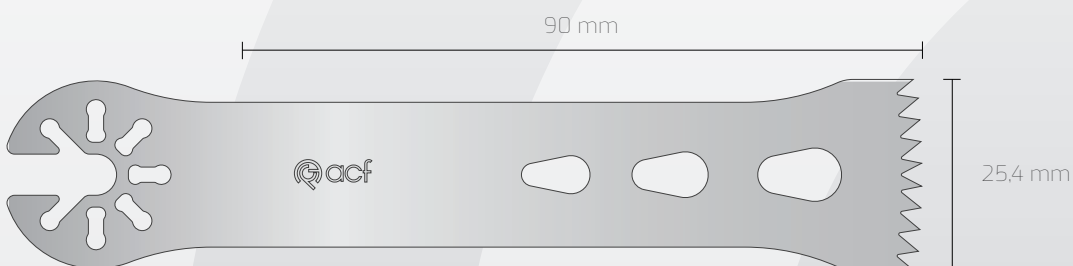


● Non Sterile  
● Sterile R

Ref	140 254 090 127	140 254 090 130	140 254 090 137	140 254 090 140	140 254 090 147
Thickness	1,27 mm	1,30 mm	1,37 mm	1,40 mm	1,47 mm

**Compatible Connections;**


M Power PRO6300, M Power2 PRO6350M, PowerPro Max PRO5300M, PowerPro Electric II PRO6125, PowerPro Pneumatic PRO6175, Hall 4 5067-002, Hall 3 5044-002, Versipower Plus 5071-002, Hall 50 PRO7300B

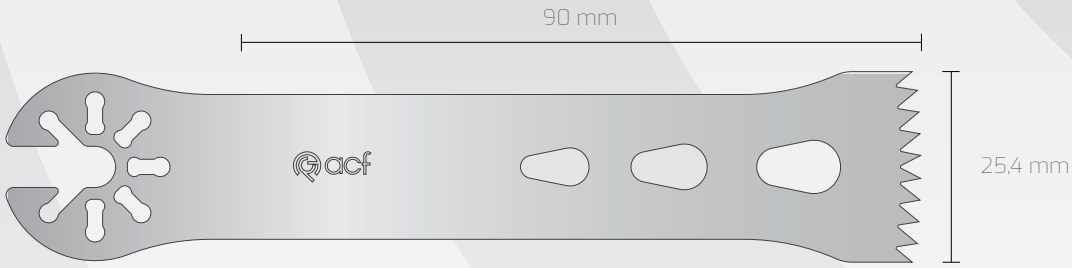

● Non Sterile  
● Sterile R

**Ref** 140 254 090 150


Thickness 1,50 mm

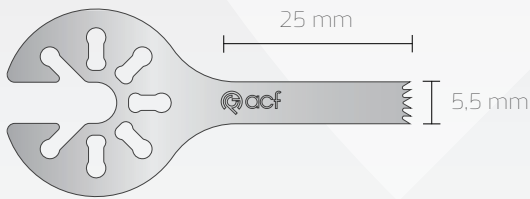

● Non Sterile  
● Sterile R

**Ref** 140 055 025 060


Thickness 0,60 mm

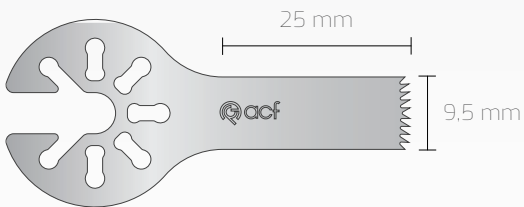

● Non Sterile  
● Sterile R

**Ref** 140 095 025 060

Thickness 0,60 mm

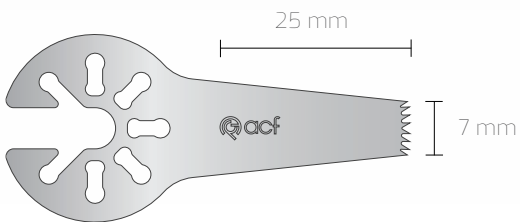


● Non Sterile  
● Sterile R

**Ref** 140 070 025 060


Thickness 0,60 mm



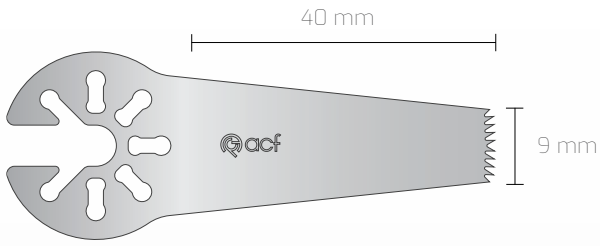


● Non Sterile  
● Sterile R

**Ref** 140 090 040 060  
**Thickness** 0,60 mm

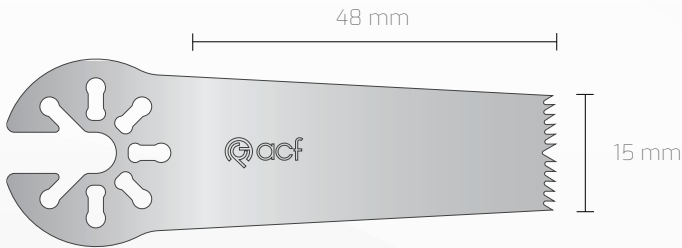


● Non Sterile  
● Sterile R

**Ref** 140 150 048 060  
**Thickness** 0,60 mm

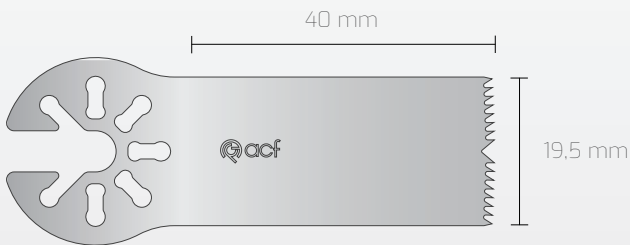

● Non Sterile  
● Sterile R

**Ref** 140 195 040 060  
**Thickness** 0,60 mm

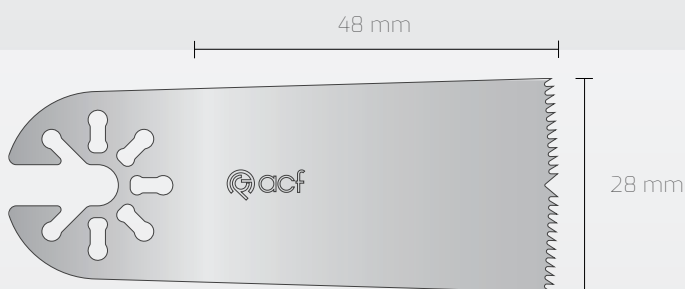


● Non Sterile  
● Sterile R

**Ref** 140 280 048 060  
**Thickness** 0,60 mm

**Compatible Connections;**


M Power PRO6300, M Power2 PRO6350M, PowerPro Max PRO5300M, PowerPro Electric II PRO6125, PowerPro Pneumatic PRO6175, Hall 4 5067-002, Hall 3 5044-002, Versipower Plus 5071-002, Hall 50 PRO7300B

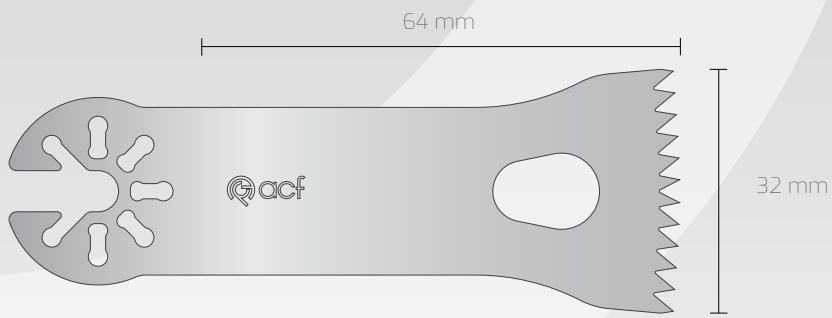

● Non Sterile  
● Sterile R

**Ref** 140 320 064 090


Thickness 0,90 mm

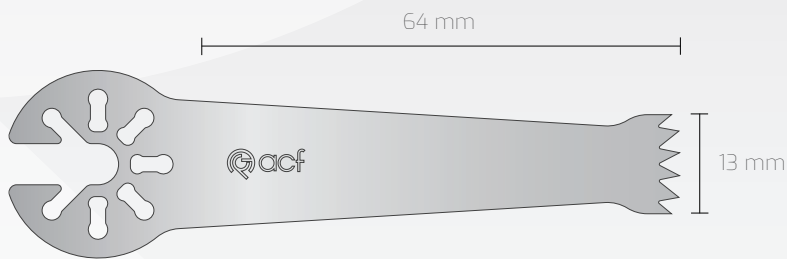

● Non Sterile  
● Sterile R

**Ref** 140 130 064 090


Thickness 0,90 mm

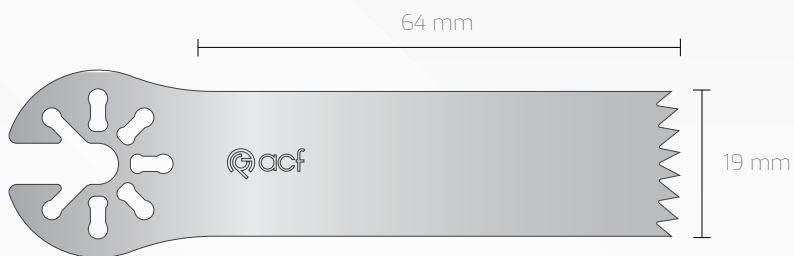

● Non Sterile  
● Sterile R

**Ref** 140 190 064 090


Thickness 0,90 mm

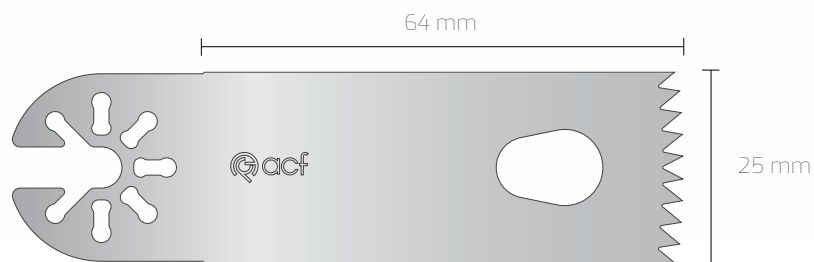

● Non Sterile  
● Sterile R


**Ref** 140 250 064 090

Thickness 0,90 mm

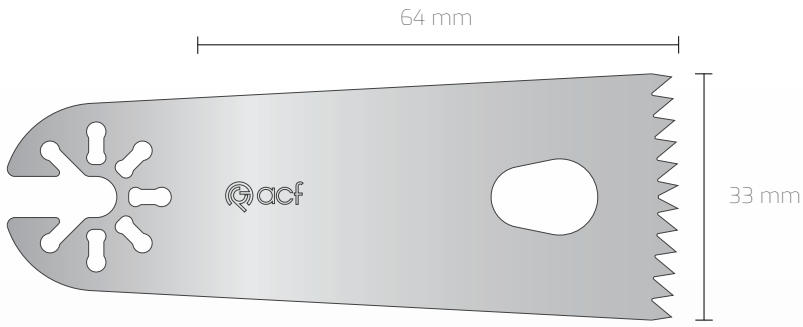


● Non Sterile  
● Sterile R

**Ref** 140 330 064 090  
**Thickness** 0,90 mm

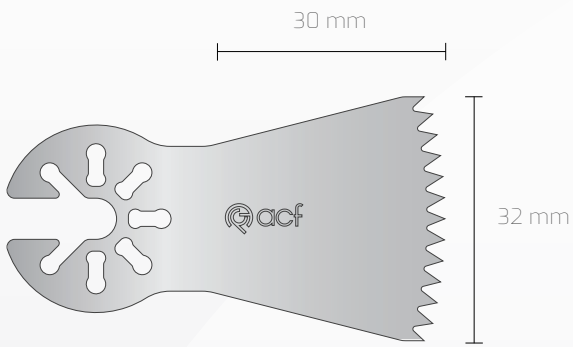

● Non Sterile  
● Sterile R

**Ref** 140 320 030 090  
**Thickness** 0,90 mm

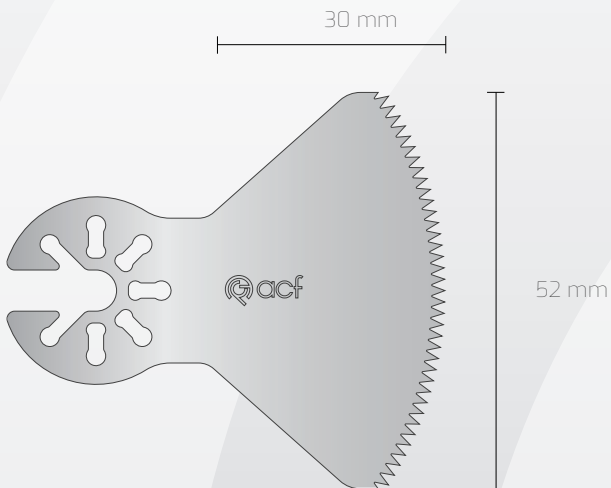


● Non Sterile  
● Sterile R

**Ref** 140 520 030 090  
**Thickness** 0,90 mm

Conmed Linvatec®

**Compatible Connections;**

M Power PRO6300, M Power2 PRO6350M, PowerPro Max PRO5300M, PowerPro Electric II PRO6125, PowerPro Pneumatic PRO6175, Hall 4 5067-002, Hall 3 5044-002, Versipower Plus 5071-002, Hall 50 PRO7300B

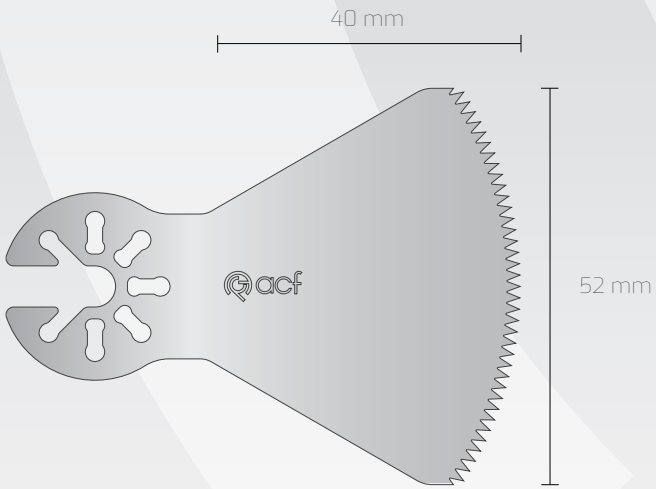


● Non Sterile

● Sterile R


<b>Ref</b>	<b>140 520 040 090</b>
Thickness	0,90 mm

CONMED LINVATEC®

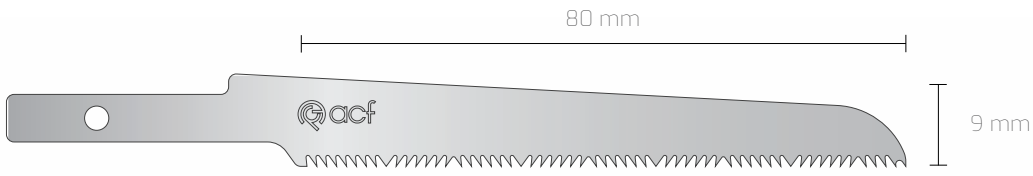


● Non Sterile  
 ● Sterile R

**Ref** 100 090 080 060  
 Thickness 0,60 mm

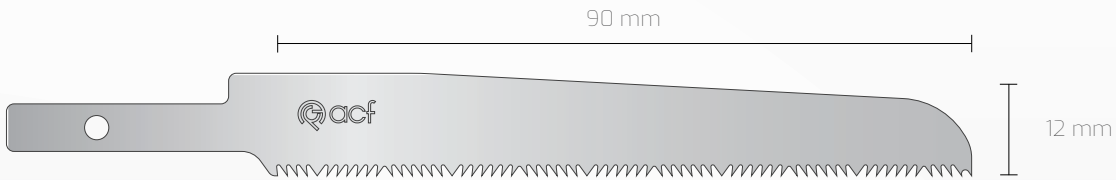


● Non Sterile  
 ● Sterile R

**Ref** 100 120 090 060      100 120 090 090  
 Thickness 0,60 mm      0,90 mm

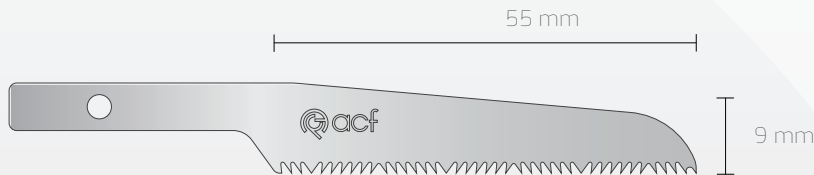

● Non Sterile  
 ● Sterile R

**Ref** 100 090 055 060      100 090 055 090  
 Thickness 0,60 mm      0,90 mm

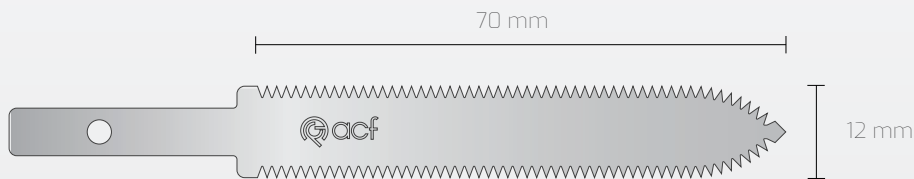


● Non Sterile  
 ● Sterile R

**Ref** 100 120 070 060      100 120 070 090      100 120 070 100      100 120 070 120  
 Thickness 0,60 mm      0,90 mm      1,00 mm      1,20 mm

Conmed Linvatec®

**Compatible Connections;**


PowerPro Pneumatic PRO6185, PowerPro Electric II PRO6135,  
PowerPro Max PRO5400M, MPower 2 PRO6400M, MPower PRO6400,  
Hall 4 5067-003, Hall 50 PRO7400B reciprocating saws

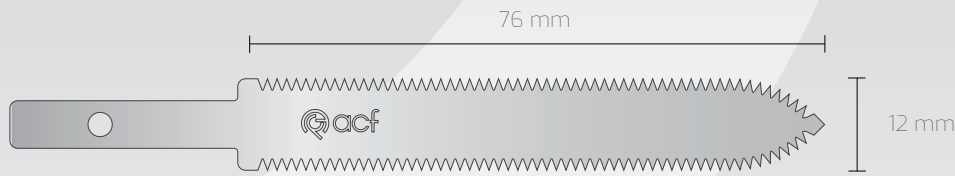

- Non Sterile
- Sterile R


<b>Ref</b>	<b>100 120 076 060</b>	<b>100 120 076 090</b>	<b>100 120 076 100</b>	<b>100 120 076 120</b>
Thickness	0,60 mm	0,90 mm	1,00 mm	1,20 mm

CONMED LINVATEC®




● Non Sterile  
 ● Sterile R

**Ref** 100 040 006 060  
 Thickness 0,60 mm

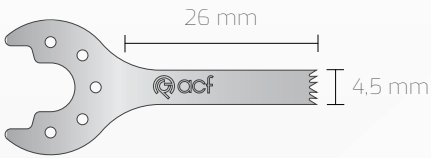

● Non Sterile  
 ● Sterile R

**Ref** 100 045 026 060  
 Thickness 0,60 mm

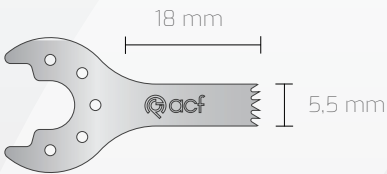

● Non Sterile  
 ● Sterile R

**Ref** 100 055 018 060  
 Thickness 0,60 mm



● Non Sterile  
 ● Sterile R

**Ref** 100 055 026 060  
 Thickness 0,60 mm

**Compatible Connections;**


Micro 100™ 5053-011, Micro Power™ 6020-022,  
Micro Power™ 6021-022 Sagittal Saws,  
MicroChoice, 5040-002, Micro E 5020-022



● Non Sterile  
● Sterile R

**Ref** 100 060 033 060


Thickness 0,60 mm

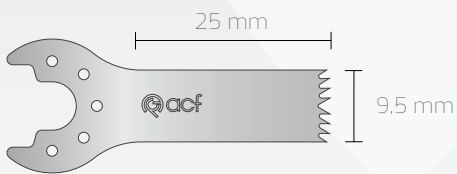

● Non Sterile  
● Sterile R

**Ref** 100 095 025 060


Thickness 0,60 mm

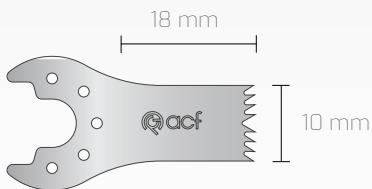

● Non Sterile  
● Sterile R

**Ref** 100 100 018 060

Thickness 0,60 mm

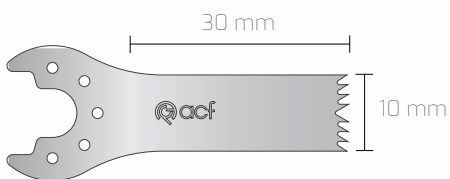


● Non Sterile  
● Sterile R

**Ref** 100 100 030 060


Thickness 0,60 mm



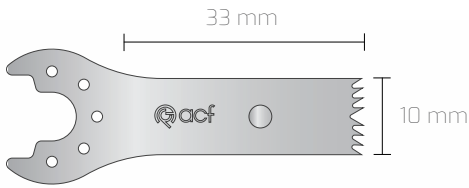


● Non Sterile  
● Sterile R

**Ref** 100 100 033 060  
Thickness 0,60 mm

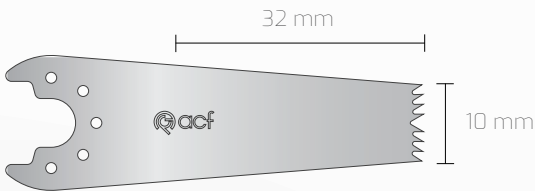

● Non Sterile  
● Sterile R

**Ref** 100 100 032 060  
Thickness 0,60 mm

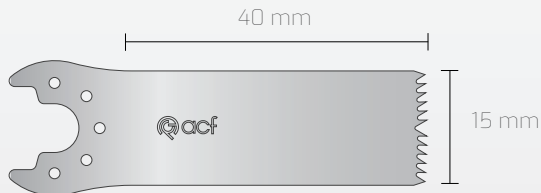

● Non Sterile  
● Sterile R

**Ref** 100 150 040 060  
Thickness 0,60 mm



ACF Medikal Urunler Mak. San. ve Tic. Ltd. Sti.

Guzelyurt Mah. 5754 Sok. No: 3/A  
Yunusemre / Manisa, Turkey, 45030

+90 236 236 28 20

info@acf.com.tr

[www.acf.com.tr](http://www.acf.com.tr)



ACF.MR.03.EN.R07 20.09.2021